
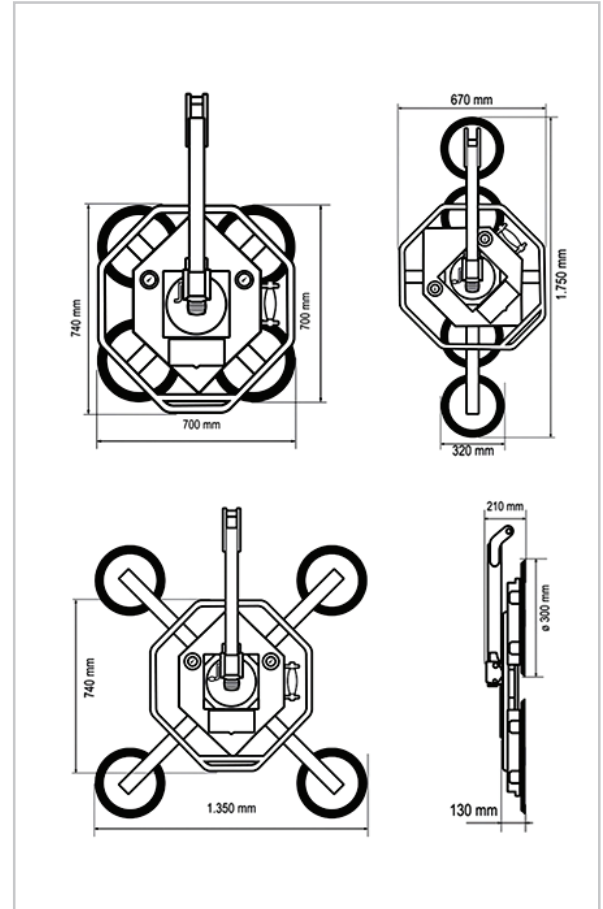


## T.UPG.350.2 datasheet

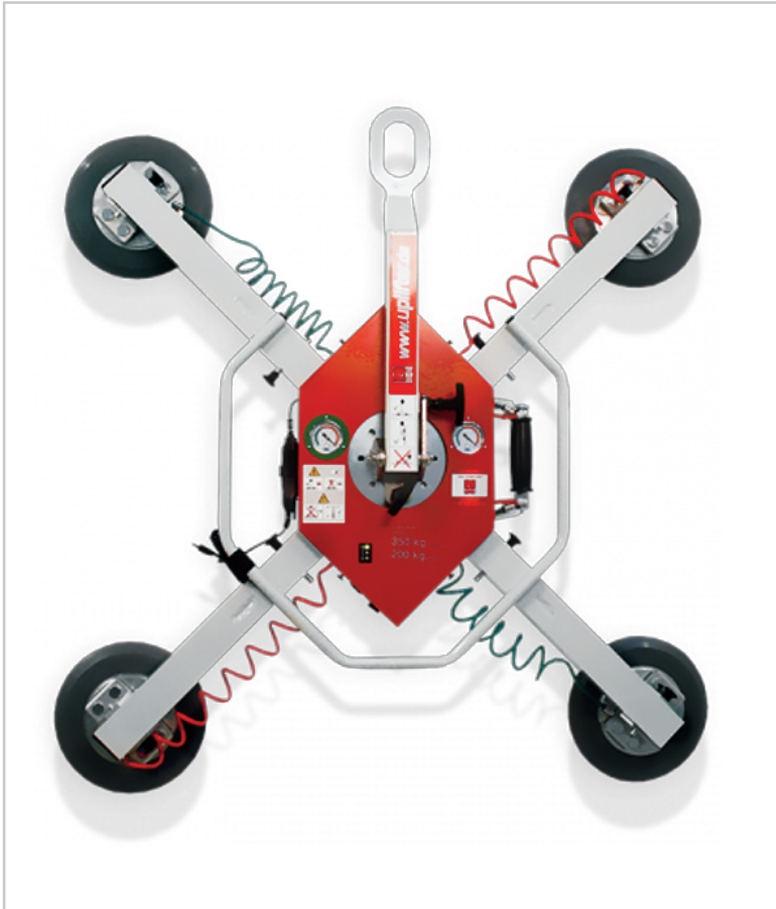

- Capacity: 350kg
- Manual 90 Degree Tilting
- Manual 360 Degree Turning
- Silicon-free vacuum cups
- Audio-visual low vacuum warning
- Integrated vacuum reserve tank
- Rechargeable 12V Battery & Charger Included
- Complies with DIN13155

### Republic of Ireland (Head Office)

Phone: 0505 45125 Fax: 0505 45345  
Web: [www.glassparts.ie](http://www.glassparts.ie) Email: [sales@glassparts.ie](mailto:sales@glassparts.ie)  
Address: Lisbunny Industrial Estate, Lisbunny, Nenagh, Co. Tipperary.

### United Kingdom (Sales Office)

Phone: 0800 975 3436 Fax: 00 353 505 45345  
Web: [www.glassparts.co.uk](http://www.glassparts.co.uk) Email: [sales@glassparts.co.uk](mailto:sales@glassparts.co.uk)  
Address: Unit 6, The Glenmore Centre, Cable St, Southampton SO145AE

T.UPG.350.2 datasheet

Description

The UPG 350-2 vacuum lifting device is specially designed for loads of up to 350 kg. Thanks to its modular design, the UPG 350-2 can be optimally adapted to your tasks. With the UPG 350-2, you can manually tilt loads for 90° and rotate them by 360° (position stopped every 45°). Glass elements can be perfectly aligned and inserted into the facade. With its rechargeable battery, the UPG 350-2 is the ideal assembly partner. The LED display indicates the current charging state. The 12 V battery is rechargeable and replaceable. If the vacuum is lost or if one vacuum circuit fails completely, the UPG 350-2 also warns the operator with an audible buzzer. The built-in suction discs with a diameter of 300 mm ensure solid adhesion and reliable power. The joints and tappets of the suction discs are also spring-loaded. The regulated vacuum pump is continually ready for operation for up to eight hours. All of the suction discs can be arranged individually without tools. By installing the optional mount extensions, you can also handle deep-frame windows.

• Lifting Capacity	up to 350 kg
• Vacuum Cups	4
• Motor	Off-grid Motor with 12 volt rechargeable battery
• Tilttable	Manual tilting 90°
• Rotatable	Manual turning 360°
• Vacuum System	2-circuit-system
• Tare Weight	35 kg, 39 kg, 43 kg
• Operating Temperature	0° up to 40° C
• Warning devices	Optic/acoustic warning devices (low Vacuum warning buzzer)
• Optional	Mount Extensions
• Operation Time	8 hours
• Height	min. 210 mm

Republic of Ireland (Head Office)

Phone: 0505 45125      Fax: 0505 45345  
Web: [www.glassparts.ie](http://www.glassparts.ie)      Email: [sales@glassparts.ie](mailto:sales@glassparts.ie)  
Address: Lisbunny Industrial Estate, Lisbunny, Nenagh, Co. Tipperary.

United Kingdom (Sales Office)

Phone: 0800 975 3436      Fax: 00 353 505 45345  
Web: [www.glassparts.co.uk](http://www.glassparts.co.uk)      Email: [sales@glassparts.co.uk](mailto:sales@glassparts.co.uk)  
Address: Unit 6, The Glenmore Centre, Cable St, Southampton SO145AE