

Dual Circuit Inline Battery Powered Vacuum Lifter -450KG



- Manual tilting 90°
- Manual turning 360°
- Silicon-free vacuum cups (Ø 300mm)
- Off-grid Motor with 12 volt rechargeable battery
- Integrated vacuum-reserve tank
- Individual Arrangement of the spring mounted vacuum Cups
- Vacuum Cups adjustable without tools
- DIN 13155
- Optic/acoustic warning devices (low Vacuum warning buzzer)


Ireland (Head Office)

Phone: 0505 45125 Fax: 0505 45345
Web: www.glassparts.ie Email: sales@glassparts.ie
Address: Lisbunny Industrial Estate, Lisbunny, Nenagh, Co. Tipperary.

United Kingdom (Sales Office)

Phone: 0800 975 3436 Fax: 00 353 505 45345
Web: www.glassparts.co.uk Email: sales@glassparts.co.uk
Address: Unit 6, The Glenmore Centre, Cable St, Southampton SO145AE

Dual Circuit Inline Battery Powered Vacuum Lifter -450KG

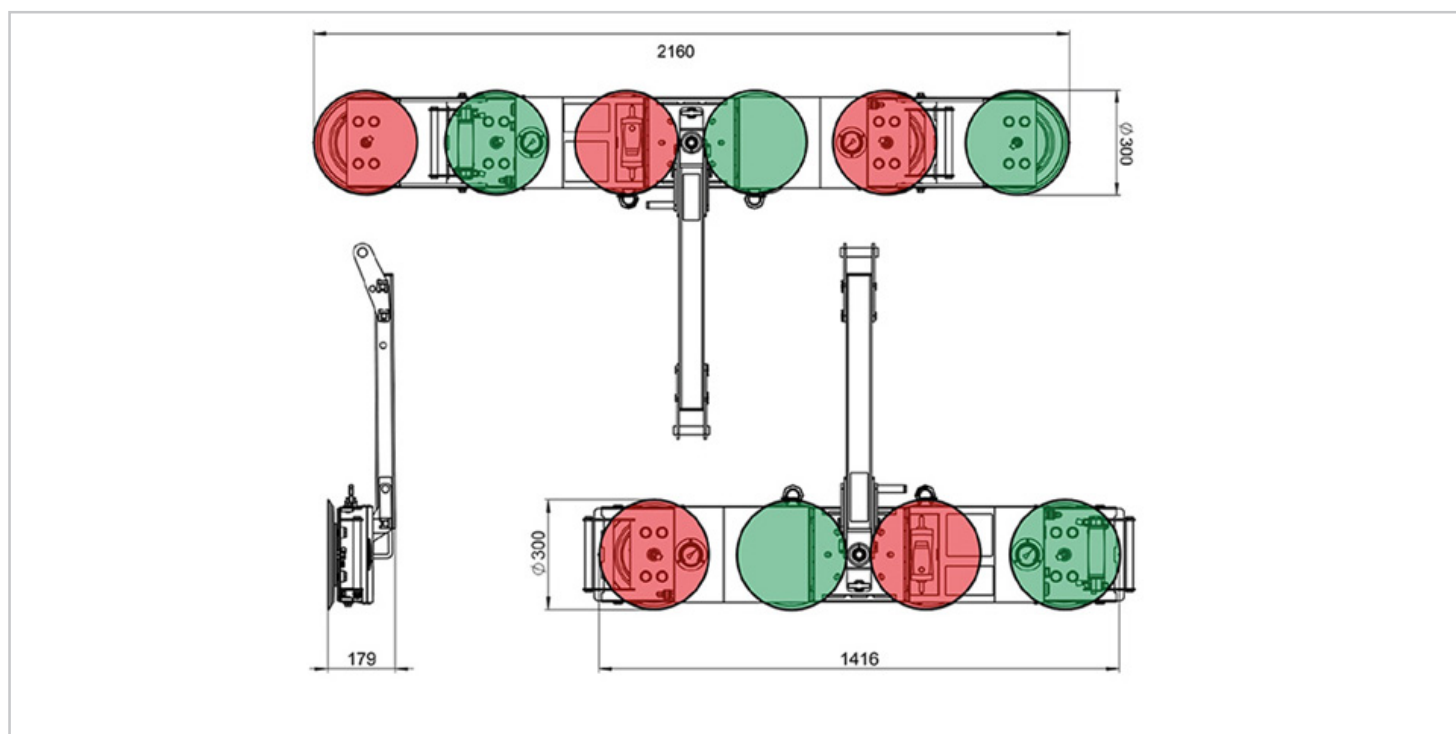

Lifting Capacity	up to 450 kg
Vacuum Cups	4 pieces / 6 pieces
Height	min. 118 mm without lad-arm min. 179 mm with load-arm
Motor	Off-grid Motor with 12 volt rechargeable battery
Operating Time	8 hours
Capacity	Battery 7 Ah
Tare Weight	47 kg / 57 kg
Protective devices	Optic/acoustic warning devices (low Vacuum warning buzzer)
Accessory	incl. wooden transportbox
Highlight	removable load-arm
Operating Temperature	0° up to 40° C
Height	min. 210 mm

Republic of Ireland (Head Office)

Phone: 0505 45125 Fax: 0505 45345
 Web: www.glassparts.ie Email: sales@glassparts.ie
 Address: Lisbunny Industrial Estate, Lisbunny, Nenagh, Co. Tipperary.

United Kingdom (Sales Office)

Phone: 0800 975 3436 Fax: 00 353 505 45345
 Web: www.glassparts.co.uk Email: sales@glassparts.co.uk
 Address: Unit 6, The Glenmore Centre, Cable St, Southampton SO145AE

Dual Circuit Inline Battery Powered Vacuum Lifter -450KG

- The four standard suction discs can be expanded to six without the need for tools. The removable load arm makes it even more flexible.
- The UPG 450 has suspension eyelets for vertical attachment without the load arm and an ergonomic manual slide valve.
- The attached suction discs (diameter 300 mm) provide high levels of adhesion and power on the construction site.
- When using vacuum suction, it is important for the surface to be completely smooth, flat and impermeable to air.
- The UPG 450 begins the vacuum suction process automatically at the push of a button. The UPG 450 vacuum battery monitors the vacuum pressure independently and permanently after suction has begun.
- If the vacuum pressure is lost, the UPG 450 re-pressurises. The UPG 450's rechargeable battery ensures maximum performance in virtually every situation.
- The integrated measuring device provides information about the vacuum and the battery's charge level.
- If the vacuum is lost or if one vacuum circuit fails completely, the UPG 450 also warns the operator with an audible buzzer.
- The regulated vacuum pump is continually ready for operation for up to eight hours. The integrated "complete shut-off switch" is a brandnew innovation. When this is switched to "off", all power sources are disconnected, which means that the power stays in the battery, actively preventing deep discharge.
- If the UPG 450's battery is empty, the new battery charger will help. The newly developed integrated charger can now (legally) recharge batteries which have been deep discharged.

Republic of Ireland (Head Office)

Phone: 0505 45125 Fax: 0505 45345
Web: www.glassparts.ie Email: sales@glassparts.ie
Address: Lisbunny Industrial Estate, Lisbunny, Nenagh, Co. Tipperary.

United Kingdom (Sales Office)

Phone: 0800 975 3436 Fax: 00 353 505 45345
Web: www.glassparts.co.uk Email: sales@glassparts.co.uk
Address: Unit 6, The Glenmore Centre, Cable St, Southampton SO145AE