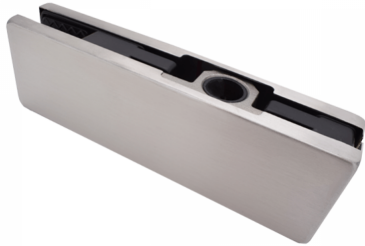## Standard Top Patch Fitting - Satin Stainless (Model: KGT20SS-STD)

• If the door panel is 3 Metres high by 1 Metres, 12mm thick glass is recommended.

• For doors that weigh 120kg and has a width of 1400mm a door rail fitting with a reinforced strap should be used.

• All covers for these fittings are manufactured by using high grade SUS stainless steel sheet, precision stamping process and polished meticulously and body using high density aluminium alloy to meet industry standards.

Attributes:

Product Code:	KGT20SS-STD
Unit Of Sale:	Each