



## Vitrine Alum. Sliding Track - Top - Flocked ( Model: GST001 )

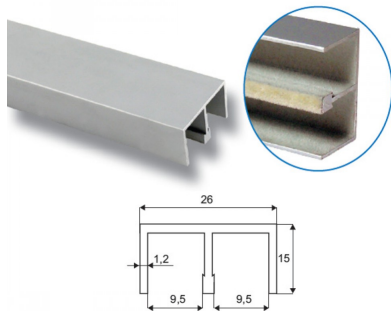

W = Inside width of frame  
GW = Glass width  
H = Inside height of frame  
GH = Glass height



With frame and high bottom rail (like on picture):

$$GW = (W - 2.50 \text{ mm}) \times 0.5$$

↓  
OVERLAY

With bumpers at the sides deduct 10 mm from the GW result.

$$GH = H - 40 \text{ mm}$$

↓  
PROFILE + AIR

Without frame and with low bottom rail:


$$GW = (W - 30 \text{ mm}) \times 0.5$$

↓  
OVERLAY

With bumpers at the sides deduct 10 mm from the GW result.

$$GH = H - 32 \text{ mm}$$

↓  
PROFILE + AIR

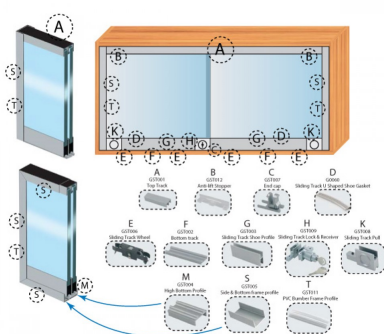

- Glass thickness: 5-6mm.

- Use of 2 roller bearings 25kg; 4 roller bearings = 50kg.

- Upper double - guide, not drilled, with grass flock.

### Attributes:

**Product Code:** GST001

**Unit Of Sale:** 2 Mtrs