

60mm Dia. Flat Head Fixed Bolt For 22 - 26mm Thick Glass (Model: KSP.V2003-2226-1465)




- Fixed bolt with a 60mm diameter flat head for use in spider glazing systems.
- Suitable for glazing from the outside or blind access glazing.
- Manufactured using 316 grade stainless steel.
- Standard 65mm long axis and suitable for 22 - 26mm thick glass.
- Please see the other bolts in the range for additional glass thicknesses. Special dimension glass bolts available on request.
- Glassparts recommend using thread locking compound whenever possible.

Attributes:

Product Code: KSP.V2003-2226-1465

Unit Of Sale: Each

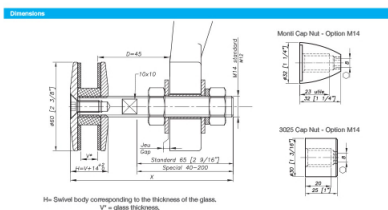

H= Selfed body corresponding to the thickness of the glass.
Y= glass thickness.

Components

MARK	QUANTITY	DESIGNATION	MATERIAL
1	1	External plate	X2 O N2 M4 17-122 as per EN 10088-3
2	1	Threaded plate	As
3	1	Spacer O 25	Plastic/Al
4	2	Conical washer	EPDM
5	1	Glass nut O 60	X2 O N2 M4 17-122 as per EN 10088-3
6	1	Nut EN 10088	As
7	2	Washer	As
8	1	Lock washer 127	As
9	1	But (SMT201) M8x25	As
10	1	Nut EN 10088	As
11	1	3025 Cap Nut - Option	X2 O N2 M4 17-122 as per EN 10088-3
12	1	Mount Cap Nut - Option	X2 O N2 M4 17-122 as per EN 10088-3

